



# Mezzo Flush Large

Ceiling or wall mounted

Installation Instructions



LIGHTING

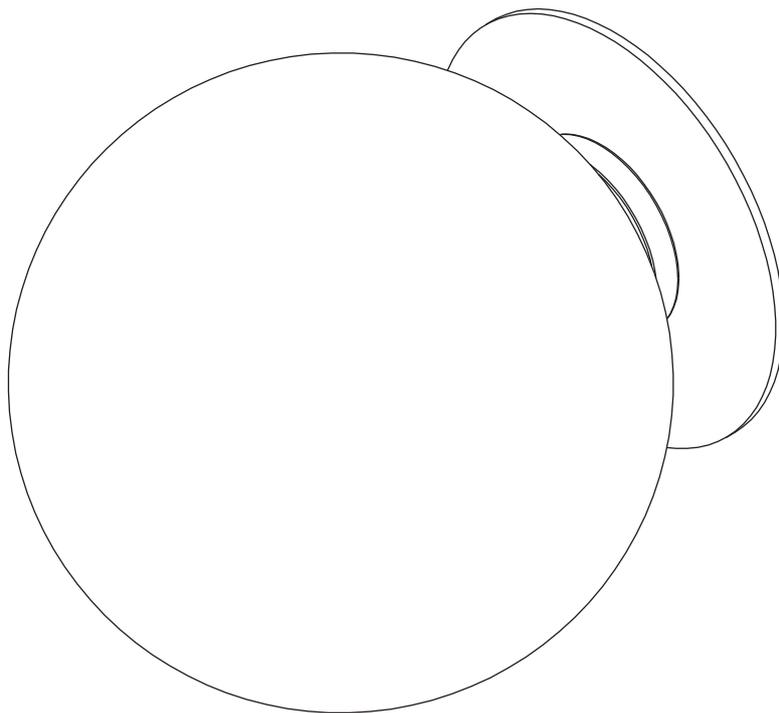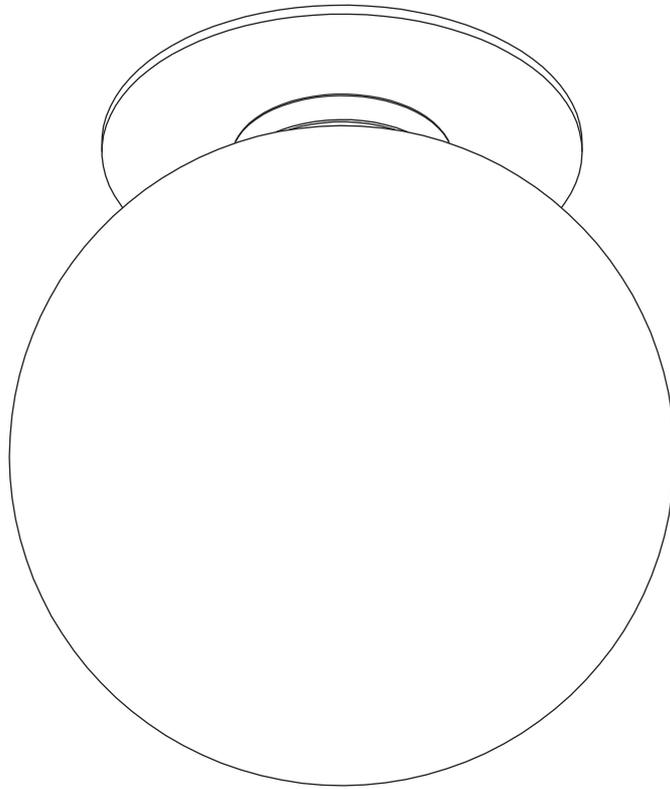


## Technical


<b>bulbs</b>	240v - 1 x G9 mains halogen - 25 watt max 120v - 1 x G9 mains halogen - 25 watt max
<b>weight</b>	1kg (2.2lbs)
<b>certification</b>	CE compliant IP44 (240v only)
<b>cleaning</b>	<p><b>Satin Brass</b> To clean use a soft dry cloth. If any marks remain clean the area using a damp soft cloth then dry afterwards with a soft cloth.</p> <p><b>Polished Nickel</b> To clean use a soft dry cloth. If any marks remain clean the area using a damp soft cloth then dry afterwards with a soft cloth.</p> <p><b>Glass</b> Remove the glass from the fixture and clean using a damp dust cloth, make sure you dry the glass fully prior putting it back on the fixture.</p>

## Components


Parts supplied as below, carefully unwrap them prior to installation.



1 x Opal glass shade



1 x Adaptor plate  
2 x screws  
(120v only)



1 x Mezzo Flush

## Before Installation

Installation must be carried out by a qualified electrician.

Check that the surface the fixture is being mounted to is suitable and strong enough to support the weight of the fitting.


Always wear soft cotton gloves when installing the fixture.

Carefully unwrap the product and handle with care during installation.

Please note; we do not supply bulbs or mounting screws.


## Step 1 - 240v

**A.** Make the electrical connection between the ceiling/wall and the fitting ensuring all wires are colour matched and the fitting is earthed correctly.




**B.** Before mounting the fitting, ensure that the surface being mounted to is flat and smooth to create a secure seal around the back plate.

Fit the backplate to the surface using screws suitable for the surface you are mounting to tightly, creating a secure seal.

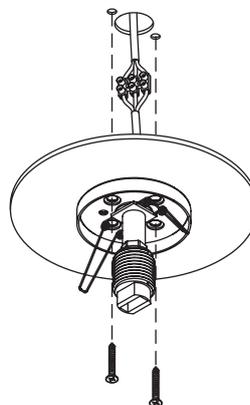


## Step 1 - 120v

**A.** Fix the Adaptor plate to the junction box using suitable screws (not supplied).

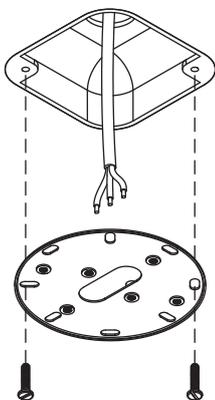

**B.** Make the electrical connection between the ceiling/wall and the fitting ensuring all wires are colour matched and the fitting is earthed correctly.

Gently push the electrical connections into the junction box and screw the fitting onto the adaptor plate using the supplied screws.

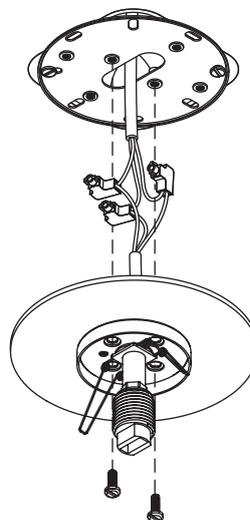


## Step 2

Fit the bulb to the lampholder followed by the opal glass shade.

To fit the opal glass shade, gently pinch the spring clips inwards and push the glass over the brass cap.

Do not release the glass shade too quickly as this may damage the fitting.

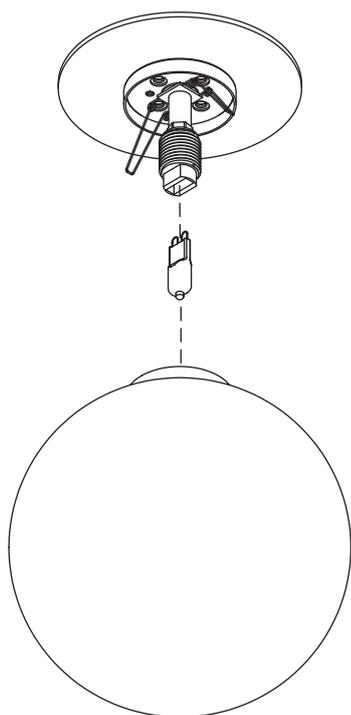

**CTO Lighting**  
9 Cloudesley Road  
London  
N1 0FH

tel: +44 (0)20 7686 8700  
fax: +44 (0)20 7686 8701

info@ctolighting.co.uk  
**www.ctolighting.co.uk**