

TINTO PENDANT (FLEX)

FINISH

bronze with black silk braided flex
satin brass with black silk braided flex

DIMENSIONS (body of fixture)

ø 450 x 145 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 265 mm

supplied with 1000mm flex as standard (adjustable on site)

ILLUMINATION

integrated LED - 8w - 2700K

LED driver to be installed in the ceiling rose

drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard

DALI option available (220-240v only)

0/1-10v (220-240v or 110-130v) - on request



CEILING ROSE / PLATE

round ceiling rose - ø 45 x 120 mm (dia x h)


CERTIFICATION




VIEW ON WEBSITE

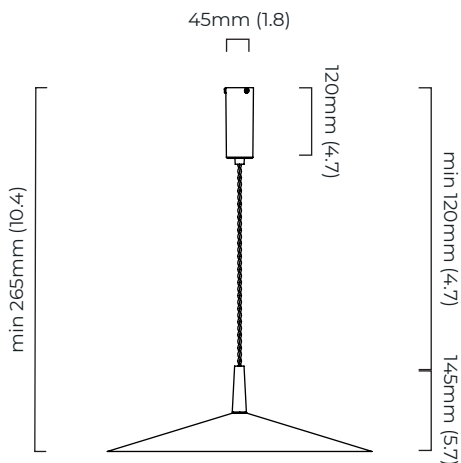

mounting plate dimensions

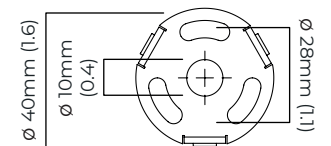

North America junction box cover

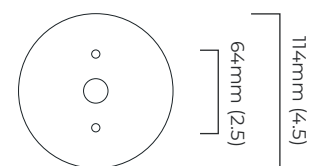

*Diagrams are not to scale.

TINTO PENDANT (FLEX) - DALI-A

FINISH

bronze with black silk braided flex
satin brass with black silk braided flex

DIMENSIONS (body of fixture)

ø 450 x 145 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 265 mm

supplied with 1000mm flex as standard (adjustable on site)

ILLUMINATION

integrated LED - 8w - 2700K

DALI converter to be installed in the ceiling cavity

drivers must be installed up to 20 meters from the body of the light

DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling rose - ø 45 x 120 mm (dia x h)

CERTIFICATION



VIEW ON WEBSITE

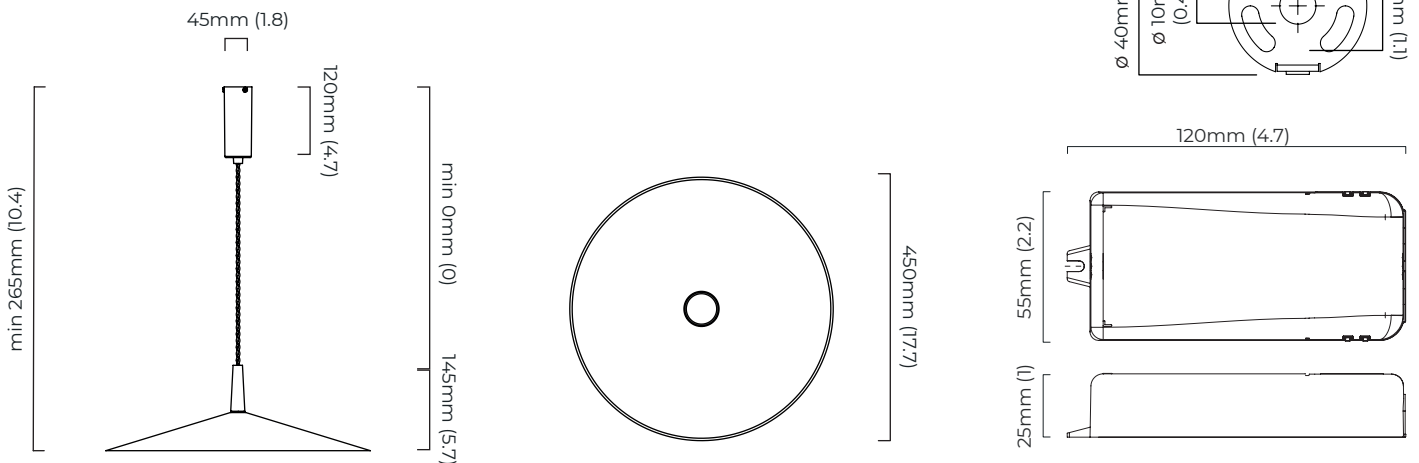

*Diagrams are not to scale.

TINTO PENDANT (FLEX) - DALI-B

FINISH

bronze with black silk braided flex
satin brass with black silk braided flex

DIMENSIONS (body of fixture)

ø 450 x 145 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 180 mm

supplied with 1000mm flex as standard (adjustable on site)

ILLUMINATION

integrated LED - 8w - 2700K

DALI LED driver to be installed in the ceiling rose

DIMMING

Dali compatible


CEILING ROSE / PLATE

round ceiling rose - ø 140 x 35 mm (dia x h)

CERTIFICATION



VIEW ON WEBSITE

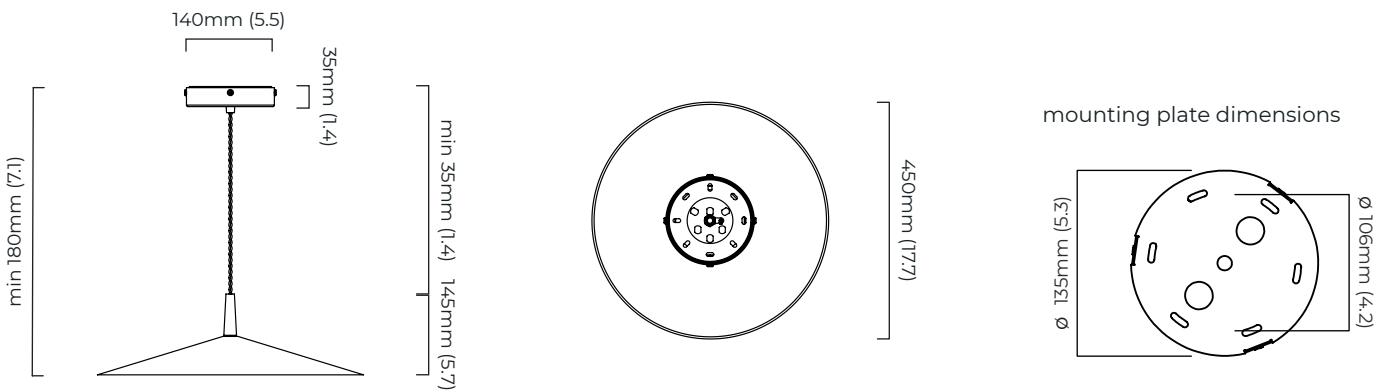

*Diagrams are not to scale.

TINTO PENDANT (FLEX)

TINTO PENDANT (FLEX)

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
TINPEMBZBF-240	bronze with black silk braided flex	220 - 240V
TINPEMSBBF-240	satın brass with black silk braided flex	220 - 240V
TINPEMBZBF-110	bronze with black silk braided flex	110 - 130v
TINPEMSBBF-110	satın brass with black silk braided flex	110 - 130v

TINTO PENDANT (FLEX) - DALI-A

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
TINPEMBZBF-DALIA-240	bronze with black silk braided flex	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
TINPEMSBBF-DALIA-240	satın brass with black silk braided flex	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

TINTO PENDANT (FLEX) - DALI-B

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
TINPEMBZBF-DALIB-240	bronze with black silk braided flex	DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity.	220 - 240V
TINPEMSBBF-DALIB-240	satın brass with black silk braided flex	DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity.	220 - 240V